




Elbow Bulkhead Couplings - EBC (BAR-STOCK)


ISO fittings

Metric Tube end as per ISO 8434


Metric Tube end / Metric Tube end
D = 16 mm (max)
Lock Nut according ISO 8434-1
Refer page of lock nut (84) for details

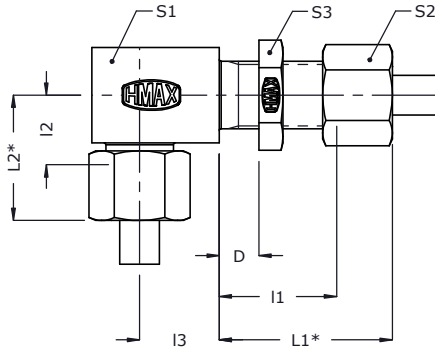

2D Assembly

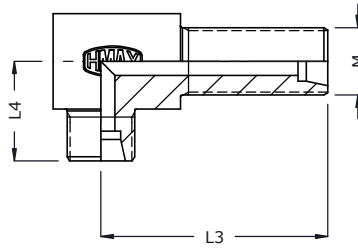

2D Body



Series	Tube od D1	Metric (M)	I1	I2	I3	L1*	L2*	L3	L4	S1	S2	S3	Assembly		Body
													Part code	Item no_	Item no_
Light (L) 250 bar	6	M12 x 1.5	27.0	12.0	14	42.5	27.5	48	19	17	14	17	EBC06L	149	221
	8	M14 x 1.5	27.0	14.0	17	42.0	29.0	51	21	19	17	19	EBC08L	150	222
	10	M16 x 1.5	28.0	15.0	18	43.5	30.5	53	22	22	19	22	EBC10L	151	223
	12	M18 x 1.5	29.0	17.0	20	44.0	32.0	56	24	24	22	24	EBC12L	152	224
	15	M22 x 1.5	31.0	21.0	23	47.0	37.0	61	28	27	27	30	EBC15L	153	225
160 bar	18	M26 x 1.5	32.5	23.5	24	49.5	40.5	64	31	32	32	36	EBC18L	154	226
	22	M30 x 2.0	34.5	27.5	30	51.5	44.5	72	35	36	36	41	EBC22L	155	227
100 bar	28	M36 x 2.0	35.5	30.5	34	53.5	48.5	77	38	42	41	46	EBC28L	156	228
	35	M45 x 2.0	36.5	34.5	39	59.5	57.5	86	45	50	50	55	EBC35L	157	229
	42	M52 x 2.0	36.0	40.0	43	59.5	63.5	90	51	60	60	65	EBC42L	158	230
Heavy (S) 630 bar	6	M14 x 1.5	29.0	16.0	17	44.5	31.5	53	23	19	17	19	EBC06S	159	1273
	8	M16 x 1.5	29.0	17.0	18	44.0	32.0	54	24	22	19	22	EBC08S	160	237
	10	M18 x 1.5	29.5	17.5	20	46.5	34.5	57	25	24	22	24	EBC10S	161	238
	12	M20 x 1.5	30.5	21.5	21	47.0	38.0	59	29	27	24	27	EBC12S	162	239
400 bar	16	M24 x 1.5	31.5	24.5	24	50.5	43.5	64	33	30	30	32	EBC16S	163	241
	20	M30 x 2.0	33.5	26.5	30	56.0	49.0	74	37	36	36	41	EBC20S	164	242
	25	M36 x 2.0	35.0	30.0	34	60.0	55.0	81	42	42	46	46	EBC25S	165	243
250 bar	30	M42 x 2.0	37.5	35.5	39	65.5	63.5	90	49	50	50	50	EBC30S	166	1274
	38	M52 x 2.0	37.0	41.0	43	68.5	72.5	96	57	60	60	65	EBC38S	167	1275

* Dimensions given are approx figures with tightened nut.