




Swivel Branch Tee Couplings - SBT (BAR - STOCK)

ISO fittings

Metric Tube end as per ISO 8434

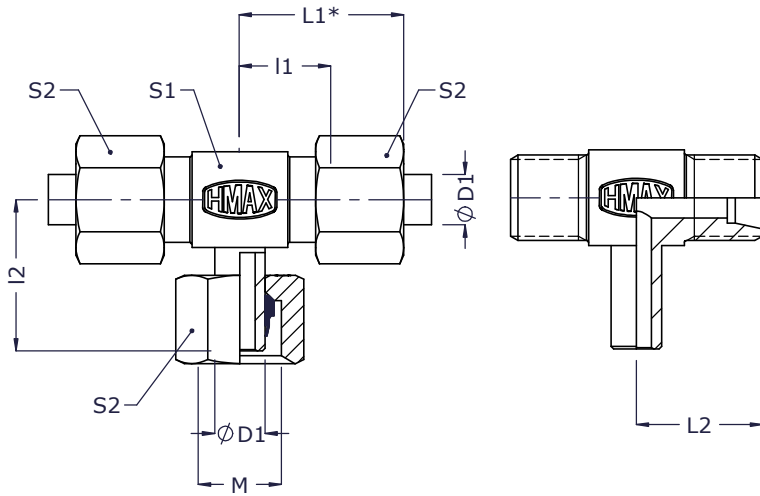

2D Assembly

2D Body

Series	Tube od $\phi D1$	M Metric thread	I1	I2	L1*	L2	S1	S2	Assembly		Body
									Part code	Item no_	Item no_
Light (L) 250 bar	6	M12x1.5	12.0	26.0	27.5	19	12	14	SBT6L-F	817	436
	8	M14x1.5	14.0	27.5	29.0	21	14	17	SBT8L-F	818	323
	10	M16x1.5	15.0	29.0	30.5	22	17	19	SBT10L-F	819	2076
	12	M18x1.5	17.0	29.5	32.0	24	19	22	SBT12L-F	820	2096
	15	M22x1.5	21.0	32.5	37.0	28	22	27	SBT15L-F	821	2097
160 bar	18	M26x1.5	23.5	35.5	40.5	31	27	32	SBT18L-F	822	2098
	22	M30x2.0	27.5	38.5	44.5	35	30	36	SBT22L-F	823	2099
100 bar	28	M36x2.0	30.5	43.0	48.5	38	36	41	SBT28L-F	824	2100
	35	M45x2.0	34.5	51.0	57.5	45	46	50	SBT35L-F	825	2101
	42	M52x2.0	40.0	56.0	63.5	51	55	60	SBT42L-F	826	2102
Heavy (S) 630 bar	6	M14x1.5	16.0	27.0	31.5	23	14	17	SBT6S-F	827	2103
	8	M16x1.5	17.0	27.5	32.0	24	17	19	SBT8S-F	828	2104
	10	M18x1.5	17.5	30.0	34.5	25	19	22	SBT10S-F	829	2105
	12	M20x1.5	21.5	31.0	38.0	29	22	24	SBT12S-F	830	2106
400 bar	16	M24x1.5	24.5	36.5	43.5	33	24	30	SBT16S-F	831	2107
	20	M30x2.0	26.5	44.5	49.0	37	30	36	SBT20S-F	832	2108
	25	M36x2.0	30.0	50.0	55.0	42	36	46	SBT25S-F	833	2109
250 bar	30	M42x2.0	35.5	55.0	63.5	49	46	50	SBT30S-F	834	2110
	38	M52x2.0	41.0	63.0	72.5	57	55	60	SBT38S-F	835	2111


* Dimensions given are approx figures with tightened nut.




Swivel Branch Tee Couplings - SBT (FORGED)

ISO fittings

Metric Tube end as per ISO 8434

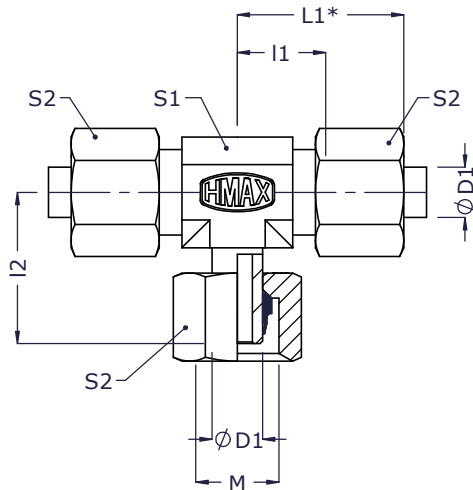

2D Assembly



2D Body



Series	Tube od ØD1	M Metric thread	I1	I2	L1*	L2	S1	S2	Assembly		Body
									Part code	Item no_	Item no_
Light (L) 250 bar	6	M12x1.5	12.0	26.0	27.5	19	12	14	SBT6L	836	2112
	8	M14x1.5	14.0	27.5	29.0	21	14	17	SBT8L	837	2113
	10	M16x1.5	15.0	29.0	30.5	22	17	19	SBT10L	838	994
	12	M18x1.5	17.0	29.5	32.0	24	19	22	SBT12L	839	2114
	15	M22x1.5	21.0	32.5	37.0	28	22	27	SBT15L	840	2115
160 bar	18	M26x1.5	23.5	35.5	40.5	31	27	32	SBT18L	841	999
	22	M30x2.0	27.5	38.5	44.5	35	30	36	SBT22L	842	964
100 bar	28	M36x2.0	30.5	43.0	48.5	38	36	41	SBT28L	843	889
	35	M45x2.0	34.5	51.0	57.5	45	46	50	SBT35L	844	2116
	42	M52x2.0	40.0	56.0	63.5	51	55	60	SBT42L	845	2117
Heavy (S) 630 bar	6	M14x1.5	16.0	27.0	31.5	23	14	17	SBT6S	846	2118
	8	M16x1.5	17.0	27.5	32.0	24	17	19	SBT8S	847	893
	10	M18x1.5	17.5	30.0	34.5	25	19	22	SBT10S	848	2119
	12	M20x1.5	21.5	31.0	38.0	29	22	24	SBT12S	849	894
400 bar	16	M24x1.5	24.5	36.5	43.5	33	24	30	SBT16S	850	2120
	20	M30x2.0	26.5	44.5	49.0	37	30	36	SBT20S	851	2121
	25	M36x2.0	30.0	50.0	55.0	42	36	46	SBT25S	852	2122
250 bar	30	M42x2.0	35.5	55.0	63.5	49	46	50	SBT30S	853	2123
	38	M52x2.0	41.0	63.0	72.5	57	55	60	SBT38S	854	2124

* Dimensions given are approx figures with tightened nut.